AM SOLAR ZS170

MONOCRYSTALLINE

Tolerance:	**±3%**
Maximum System Voltage:	**1000V**
Maximum Power (W):	**170W**
Maximum Power Voltage (Vmpp):	**18.0V**
Maximum Power Current (Impp):	**9.4A**
Open Circuit Voltage (Voc):	**23.8V**
Short Circuit Current (Isc):	**9.5A**
Connector Type:	**Zamp**
Weight:	**13kg (28.7lbs)**
Dimensions:	**1481mm x 670mm x 35mm**

Grade A Cells

10 year limited product warranty on materials and workmanship
25 year warranty on >80% power output and 10 year warranty on >90% power output

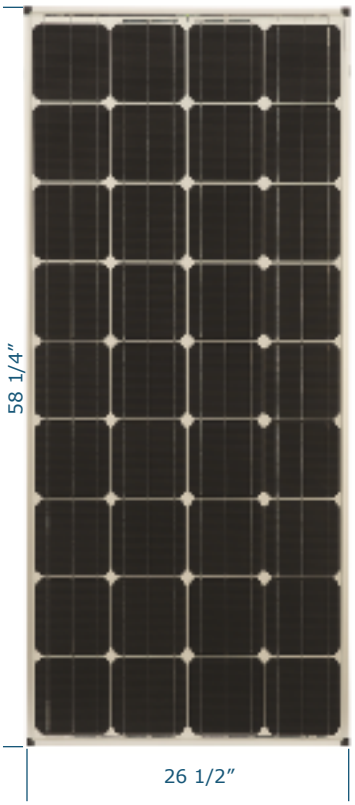

Mounting Recommendations:

Extension Beyond Panel Edge (per side)
Rocker Mounts
91M-35MA
1-1/4"

"Z" Bigfoot Mount Set
91M-35MA
0", 1-1/8"

Elevation Above Surface
Rocker Mounts
L Foot - 3 Hole (Standard)
MOUNTTL-3
1-1/8", 1-1/2", 1-7/8"

L Foot - 5 Hole
MOUNTTL-5
1-1/8", 1-1/2", 1-7/8", 2-1/4", 2-5/8"

L Foot - Tall 3 Hole
MOUNTTL-T3
3", 3-3/8", 3-3/4"

"Z" Bigfoot Mount Set
91M-35MA
1-1/2"

AM Solar Part Number: SOLAR-ZS170

A.M. Solar, Inc.
3555 Marcola Rd.
Springfield, OR 97477
www.amsolar.com

REV.180523